
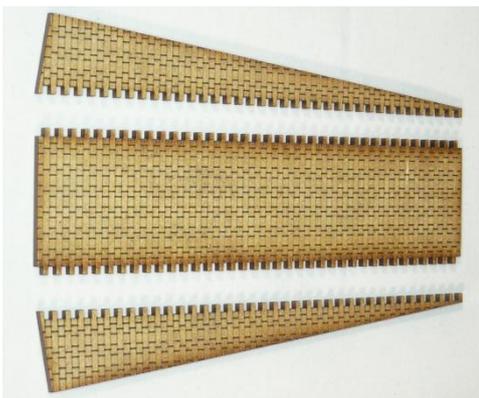
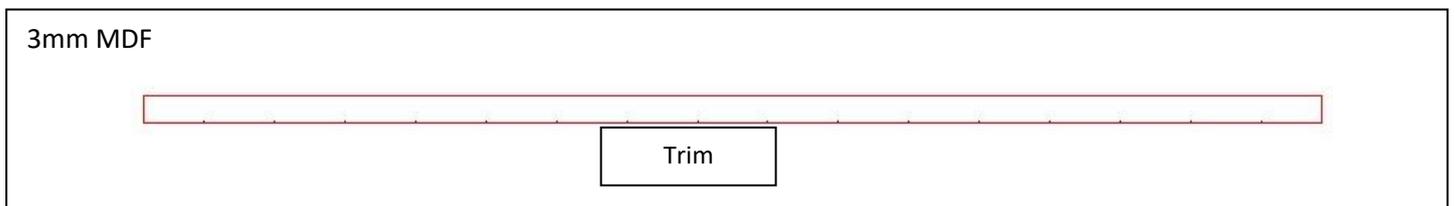
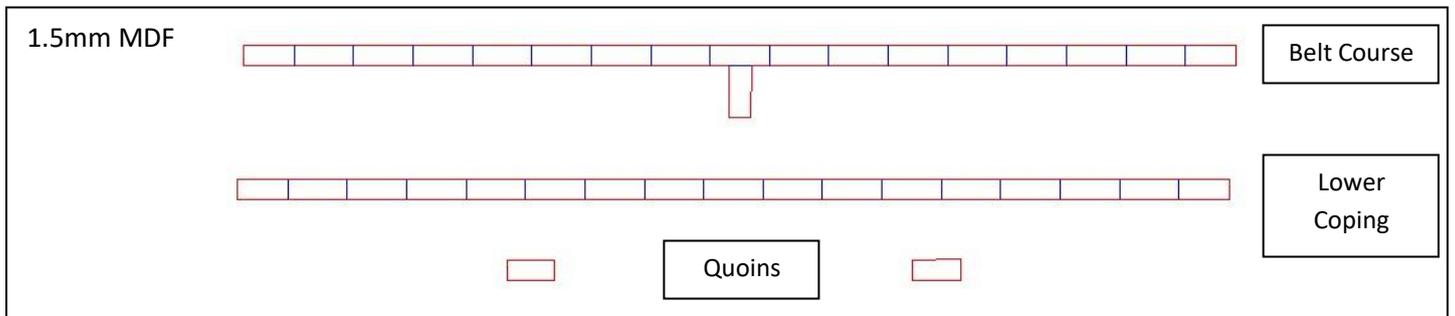


KS44-06-03 O Gauge Bridge Front - Assembly Instructions

Familiarise yourself with all the parts and read through the instructions before starting the assembly.

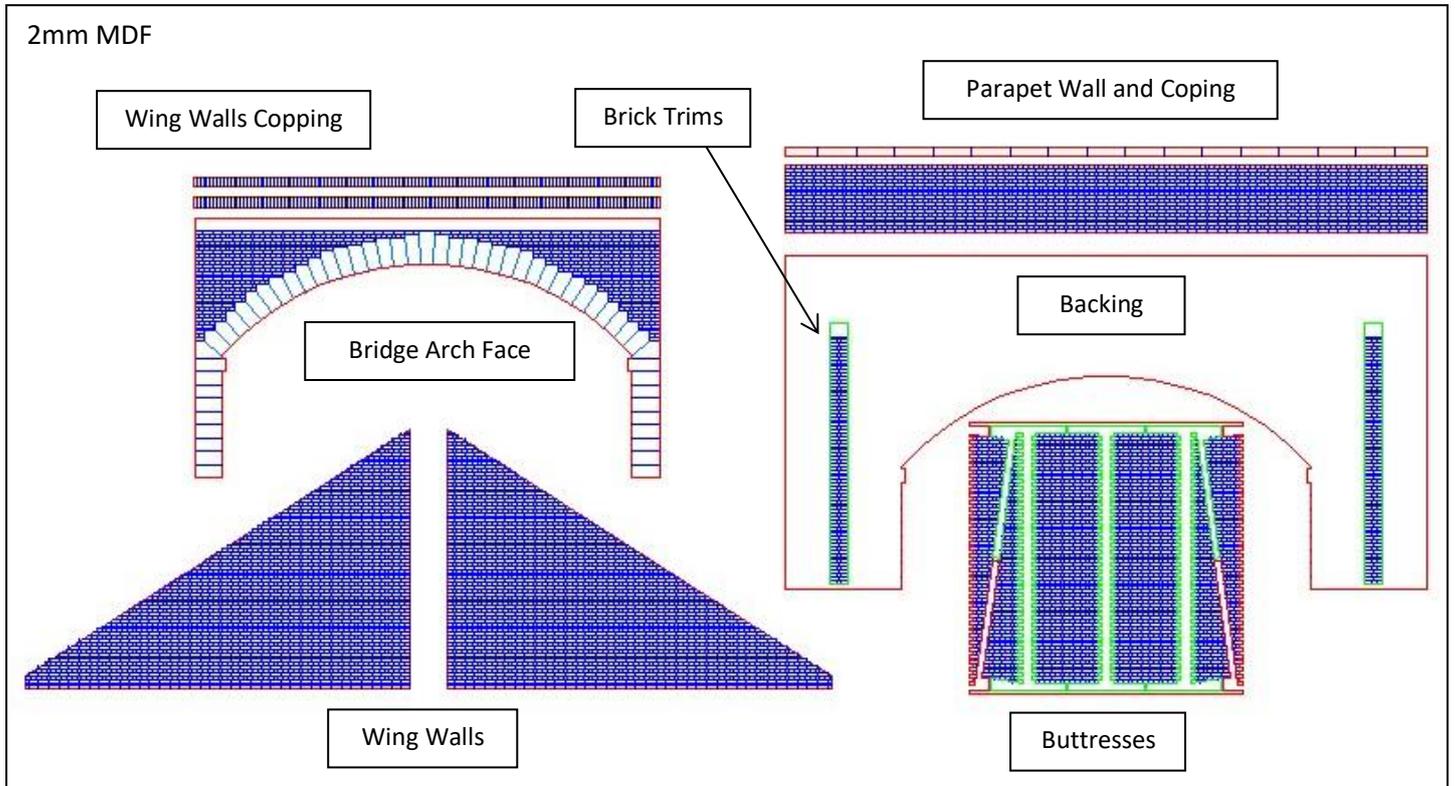

Buttress


There are 2 Buttresses and they are made up from 3 parts. Start by gluing the 3 parts together, making sure they are square.

Bridge Face Assembly

Glue the Brick Arch Face onto the Backing piece, then the two Buttresses and Brick Trims either side. Glue the Belt Course into position. Glue the Lower Copping over the 3mm Trim and then glue into position 'edge on' above the Belt Course.

The Parapet Wall can then be glued above the trim.

The two Quoins can be glued just below the arch.

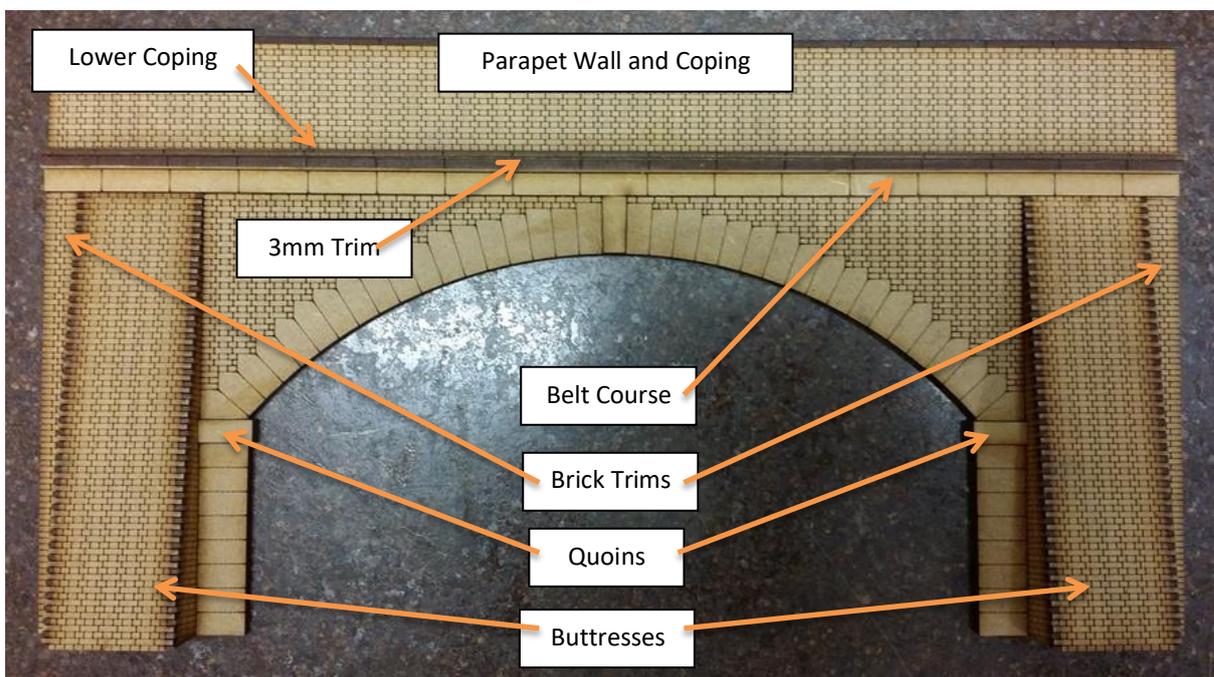

Wing Walls and Copping

The Wing Walls can be constructed in the 2 forms as illustrated in the photos, depending on your terrain. The first photo shows the Wing Wall with the optional 5ft pier which can be purchased separately.

Code for a single 5ft pier KS28-02-03

Code for a single 8ft pier KS28-01-03

